


DuoDVR™ ViP® 922

The DISH Network **SlingLoaded™ HD DuoDVR ViP922** is a state-of-the-art satellite receiver. The world's first place-shifting, multi-room, HD DVR offers an award-winning user interface, widget-based navigation technology, and innovative two-way remote controls.

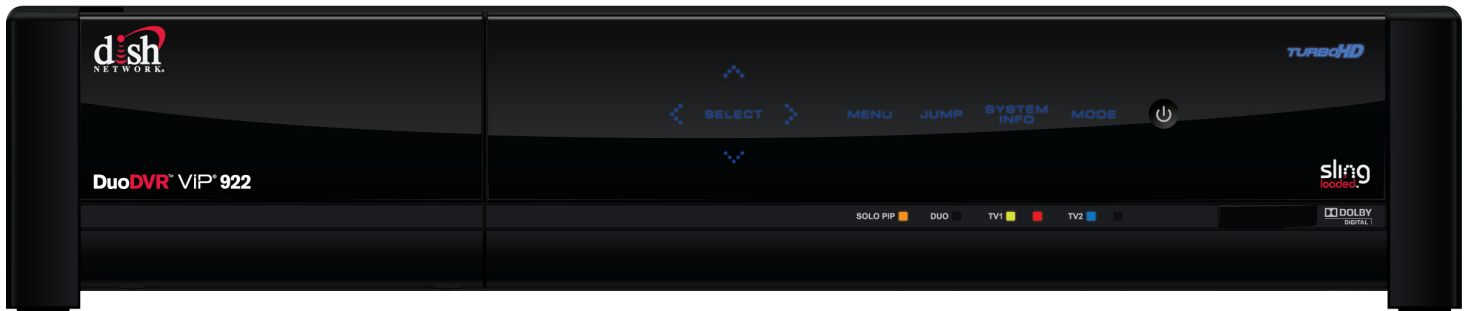

Features:

- New graphics-rich user interface for easier navigation
- Digital video recorder with name-based recording and recorded events management
- SlingLoaded™ for integrated place-shifting capabilities
- Up to 9-day Picture-In-Guide
- Picture-In-Picture (PIP) functions in Solo PIP Mode (also known as Single User Mode)
- On-screen Caller ID with history*
- Software upgradeable via satellite
- Two independent TVs supported
 - TV1: HDTV or SDTV outputs
 - TV2: SDTV outputs
- Optional MT2 over-the-air (OTA) module supports:
 - Two digital OTA tuners
 - Channel 3-4 output for TV1

* Requires Caller ID subscription with local phone company.
Phone line must be connected to receiver (phone cord not included).

Remote Features:


- Two universal, 4-component remote controls with two-way UHF-2G support
- Remotes operate the satellite receiver through walls and other obstructions using UHF-2G technology (operating range of up to 200 feet unobstructed).
- Can be programmed to operate (via IR) up to three additional devices such as TVs, VCRs, or DVD players.
- DVR buttons for: 30-sec. skip forward, 10-sec. skip back, stop, play, up to one hour pause each for TV1 and TV2, fast forward and fast reverse (4x, 15x, 60x, 300x), and slow motion and frame-by-frame (forward and back)
- Dedicated TV POWER button
- Device codes stored in receiver for massive database accessibility
- Unique MAC address in each remote control to reduce usage conflicts
- Refer to *Feature Sheet: 32.0 Remote Control* for additional details.



User Interface



DuoDVR™ ViP® 922

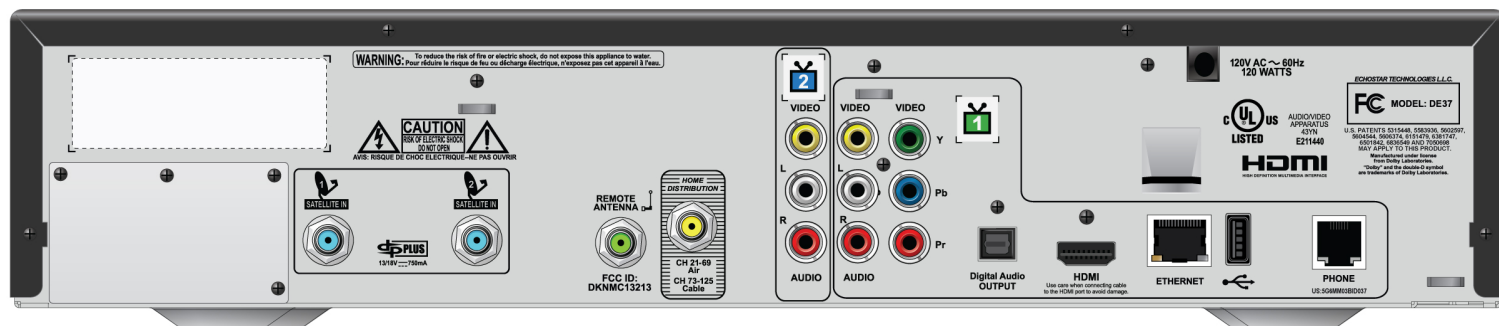

HARDWARE	MPEG-2 and MPEG-4	Yes
	# of Satellite Tuners	2 HD/SD*
	High-Definition Resolutions Supported	720p, 1080i, and 1080p24 on TV1 only
	Standard-Definition Resolutions Supported	480i and 480p on TV1; 480i on TV2
	Hard Drive Size	1 Terabyte
	Independent Output to 2 TVs	In Duo Mode
	Front Panel Buttons	Capacitive Touch
SOFTWARE	Picture-In-Picture	In Solo PIP Mode
	SlingLoaded™	Yes
	DISH On Demand (VOD)	Yes, under Watch Now in On Demand menu
	DishONLINE (IP-VOD)	Yes
	Program Guide Length	Up to 9 days
SPECS	Approx. Dimensions (H:W:D)	3.5" : 16" : 12.5"
	Approx. Weight	11.2 lb. 11.8 lb. w/module
	Color	Black

CONNECTIONS	OTA Tuners (Digital)	Two in optional MT2 OTA Module
	HDMI Digital A/V Output	Yes
	HD Component (YPbPr) Output	Yes
	S-Video Output	No
	Optical Digital Audio Output	Yes-TV1
	Sets of RCA A/V Outputs	1 each for TV1 & TV2
	Home Distribution (Agile Modulated) Output	Yes—shared for TV1 & TV2
	Channel 3-4 Modulated Output	For TV1 on optional MT2 OTA Module
	USB Ports	2 (2.0)
	Ethernet Port	Yes
REMOTES	HomePlug Turbo	Yes
	4-Component Universal Remote Controls	(2) UHF-2G
	Remote Version	32.0
REPLACEMENT SUGGESTION	Replacement Suggestion	32.0

*Additional authorization may be required before high-definition programming and/or over-the-air digital broadcasts can be viewed; additional fees may apply.