



STR-DE995/B STR-DE995/S

Receiver

Key Features

- ▲ 7 Channel Power Rating: 110W Per Channel x 7 (8 ohms 1 kHz, THD 0.7%)
100W x 7 (8 ohms 20 Hz-20kHz, THD 0.09%)
- Dolby® Digital, Dolby® Digital EX, dts®, dts ES®, dts:Neo6®, Dolby® Pro Logic® II Decoding
- ▲ S-Video Up-Conversion from Composite Video
- 2 Component Video Inputs: HD Pass (80 MHz)
- Multi-Room Audio Output with Independent Source Selection
- ▲ LCD Preprogrammed/Learning/Macro Remote Control
- ▲ Front S-Video/Composite A/V and Optical Input
- ▲ On Screen Display



Additional Features

Amplifier Section

- Black Finish A/V Receiver (Also Available in Silver)
- ▲ 7 Channel Power Rating: 110 Watts Per Channel x 7 (8 ohms 1 kHz, THD 0.7%)
- ▲ 7 Channel Power Rating: 100W Per Channel x 7 (8 ohms 20 Hz-20kHz, THD 0.09%)
- Stereo Power Rating: 100 Watts Per Channel x 2 (8 ohms 20 Hz-20 kHz, THD .09%)
- Dolby® Digital EX, dts®, 96k/24 bit dts ES®, dts:Neo6®, Dolby® Pro Logic® II Decoding
- ▲ S-Video Up-Conversion from Composite Video
- ▲ A & B/A or B Speaker Switch
- 32-bit Dolby® Digital, Dolby® Pro Logic® and dts® Decoder
- 32-bit DSP with 13 acoustic environments
- Digital Cinema Sound™ system with Cinema Studio EX modes
- Station Presets: 30 Total
- Analog Direct
- Circuit Device (Discrete)
- Sound Field Link
- Sound Field Modes (Movie/Music/AFD/2 Channel): Movie: 3 Modes; Music: 3 Modes; AFD: 6 Modes; 2 Channel: 1 Mode

Inputs and Outputs

- ▲ Assignable Digital Inputs
- ▲ 2 Component Video Inputs/1 Output: HD Pass 80 MHz
- ▲ Screw Terminals for A and B Speaker Connections (Front "A", Front "B", Center, Rear)
- Control S Input x 1/Output x 1
- ▲ Front S-Video, Composite A/V and Optical Inputs
- ▲ 5.1 and 7.1 Multi-Channel Analog Inputs
- ▲ Multi-Room Audio Output with Independent Source Selection (Via RCA Output)
- Headphone Jack 1/4" Jack Gold Plated

- Phono (mm)
- Analog Audio Input x 3; Output x 1
- Optical Audio Input x 4
- Coaxial Audio Input x 1
- Optical Audio Output x 1
- Subwoofer Pre-Out x 1
- Composite Video Input x 5
- Composite Video Output x 2
- S-Video Input x 4
- S-Video Output x 1
- Monitor Out x 2 (1 Composite, 1 S-Video)
- AC Outlet (switched) x 2
- Control A 1 II

Convenience Features

- ▲ Remote Commander® Remote Control: LCD Pre-Programmed + Learn + Limited Macro
- Easy Setup - Expandable Menu System for Simplicity
- On-screen display for Easy Set-Up


▲ = Step-Up Feature

Preliminary and Confidential


SONY

STR-DE995/B STR-DE995/S

Receiver

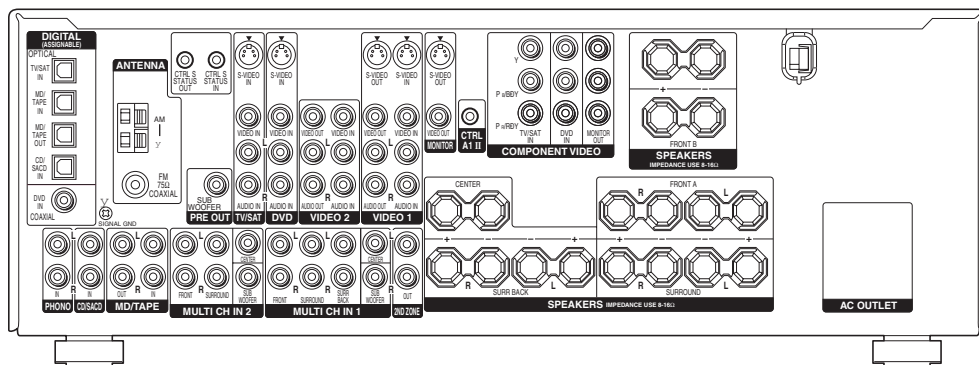

Key Technology

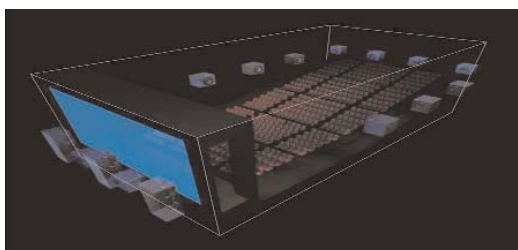

7.1 Channel Surround Sound

Auto Channel Grouping
5.1 or 6.1 Converted to 7.1 Channels
AUTOMATICALLY



Video Up Conversion

Only 1 Connection to TV Needed!
Composite Up-Converted to S-Video

Specifications

Specifications

Amplifier Section

- 7 Channel Power Rating:
110 Watts Per Channel x 7
(8 ohms 1 kHz, THD 0.7%)
- 7 Channel Power Rating:
100W Per Channel x 7
(8 ohms 20 Hz-20kHz,
THD 0.09%)
- Stereo Power Rating:
100 Watts Per Channel x 2
(8 ohms 20 Hz-20 kHz,
THD .09%)
- FM Tuning Range:
87.5 - 108 MHz
- AM Tuning Range:
530 - 1710 kHz
- Display Type (Dot FL.)
- Phono Input S/N Ratio:
86 dB
- Line Input S/N Ratio:
96 dB
- Frequency Response Line
(CD): 10 Hz-100kHz \pm 3 dB

- Phono Input Sensitivity
Impedance:
8mV/50 k ohm
- Line (CD) Input
Sensitivity/Impedance:
500mV/50 k ohm
- Record Out Level
Impedance:
500mV/10 k ohm
- Subwoofer Pre-Out Level
Impedance:
2V/1 k ohm

Video Section

- Composite Video Input
Sensitivity/Impedance:
1 Vp-p/75 ohm
- S-Video (Y)/(C) Input
Sensitivity Impedance:
(Y) 1 Vp-p/75 ohm;
(C) .286 Vp-p/75 ohm

- Component Video (Y/Pb/Pr)
Input Sensitivity Impedance:
(Y) 1 Vp-p/75 ohm;
(Pb) .7 Vp-p/75 ohm;
(Pr) .7 Vp-p/75 ohm
- Composite Video Output
Sensitivity Impedance:
1 Vp-p/75 ohm
- S-Video (Y)/(C) Output
Sensitivity Impedance:
(Y) 1 Vp-p/75 ohm;
(C) .286 Vp-p/75 ohm
- Component Video (Y/Pb/Pr)
Output Sensitivity
Impedance:
(Y) 1 Vp-p/75 ohm;
(Pb) .7 Vp-p/75 ohm;
(Pr) .7 Vp-p/75 ohm

General

- Power Requirements:
120V AC, 60 Hz
- Power Consumption:
265 Watts
- Power Consumption
(Standby): 0.3 Watts

Accessories

Supplied Accessories

- Instruction Manual
- Remote Model:
RM-LG112

Weights & Measures

- Approx. Dimensions (w/h/d):
17" x 6.2" x 14.5"
(430 x 157.5 x 369mm)
- Approx. Weight:
21 lbs. (9.5 kg)

UPC Coding

- Black: 027242618091
- Silver: 027242618107