


This is a new version firmware to PVR800 HD receiver:


Upgrade the firmware by usb, then set all and scan finish. The STB will save some user data.

Add dump data function:

Press -menu--tools-Dump By USB:


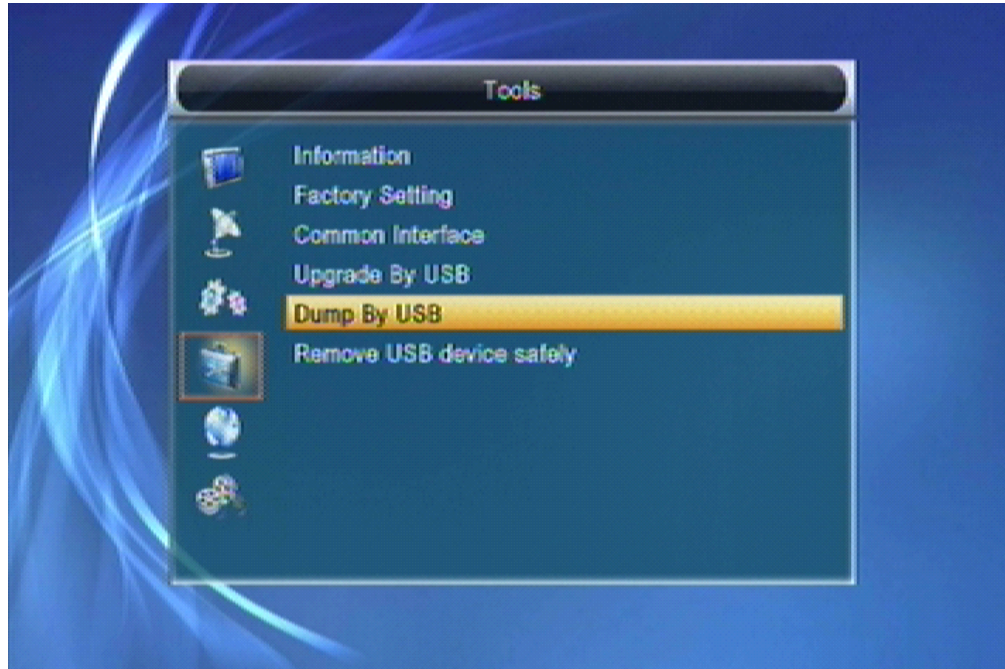


User can choose Dump mode ----Image file:

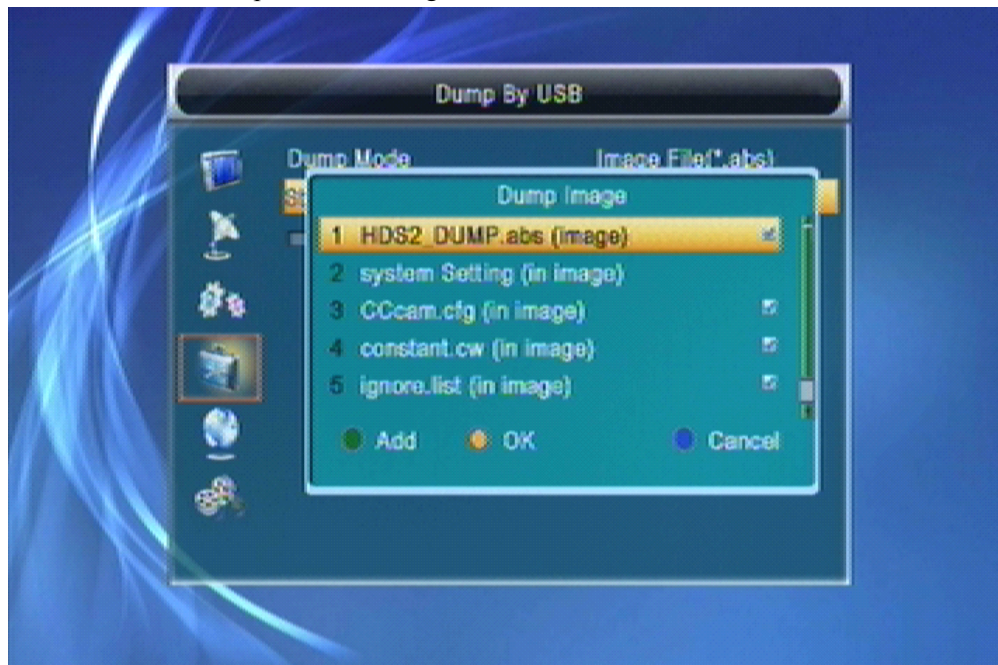

So user can option 1,2,3,4,5,6 ,then press "yellow" ,then some data will from STB dump to usb disk.

User can choose Dump mode ----Misc Files:

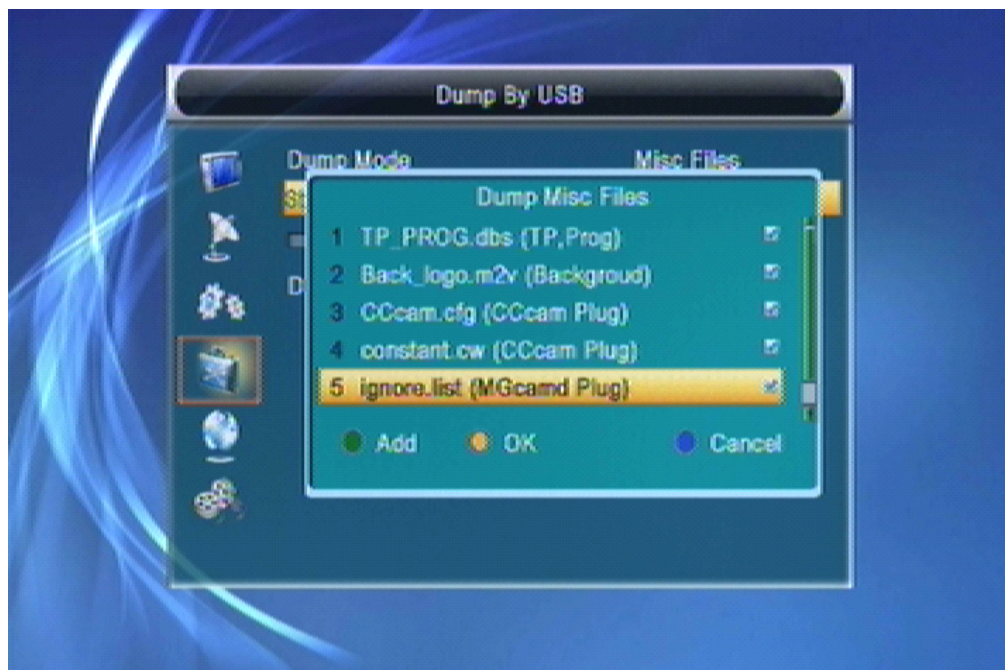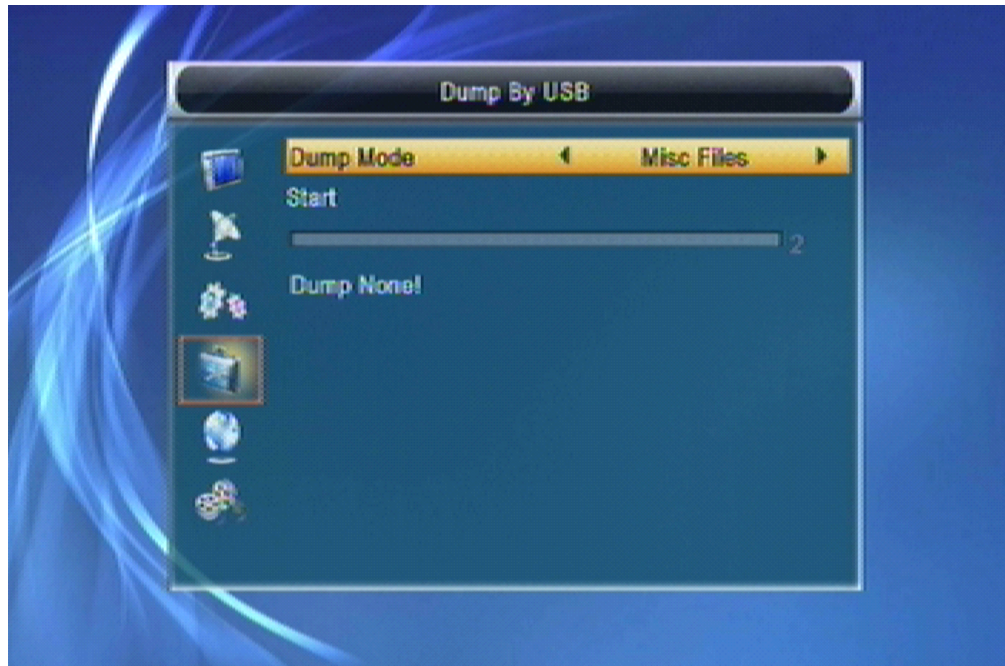

So user can option 1,2,3,4,5,6 ,then press "yellow" ,then some data will from STB dump to usb disk.

Attention:


- 1 .TP_PROG.DBS: The files is user scan all satellites TP and channels.when the files be dumped and saved to U Disk, u can easy to upgrade to STB, if u need upgrade a new firmware.
- 2 .Back-logo.m2v: the files is a back logo files, user can DIY a Back-logo.m2v format file to U

disk, then u can upgrade it to change the Back-logo.


Add Upgrade Mode By USB:

Press -menu--tools-Upgrade By USB:

User can choose Upgrade mode ----Image file. To upgrade user DIY the firmware (.abs)

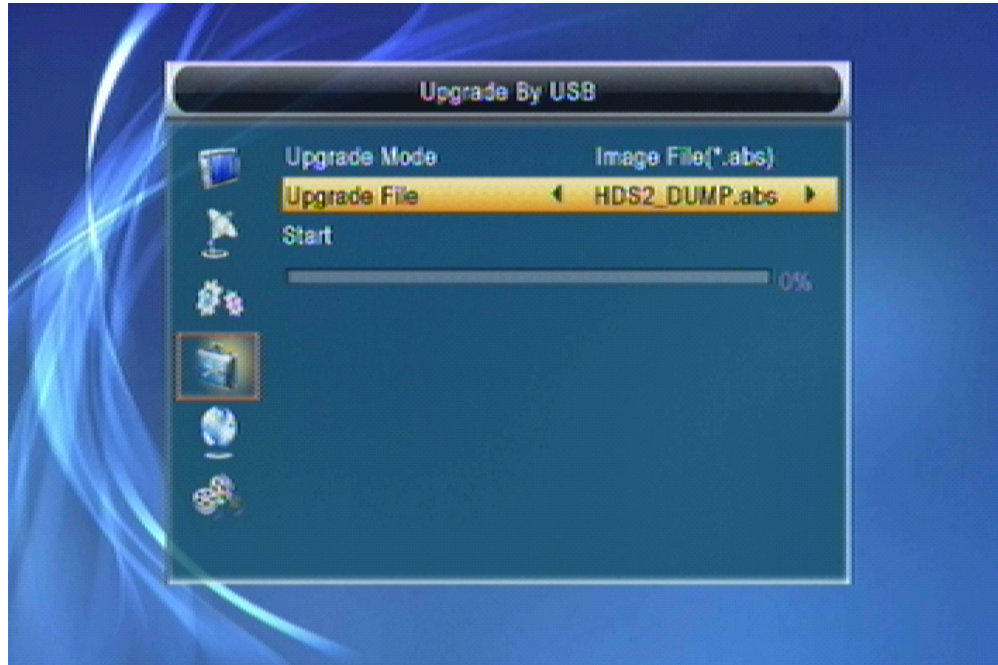

User can choose Upgrade mode ----Misc file. To upgrade user dump misc files:

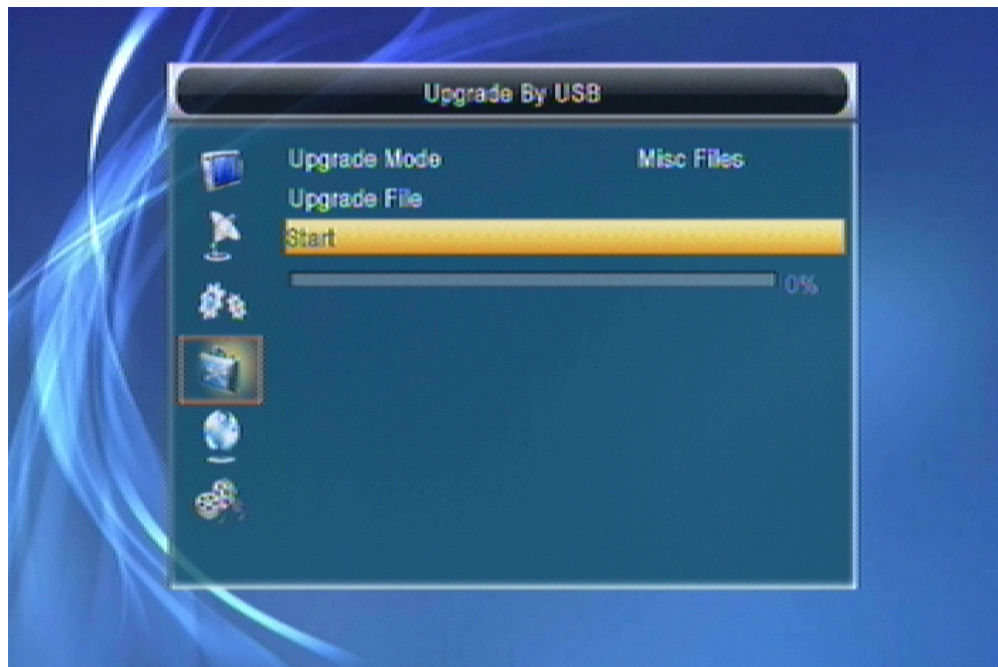


So user can option 1,2,3,4,5,6 ,then press "yellow" ,then some data will from USB disk update to STB.

Attention:

1 .TP_PROG.DBS: The files is user scan all satellites TP and channels. the files be dumped and

saved to U Disk, u can easy to upgrade to STB, When user upgraded a new firmware.


2 .Back-logo.m2v: the files is a back logo files, user can DIY a Back-logo.m2v format file to U disk, then user can upgrade it to change the Back-logo.

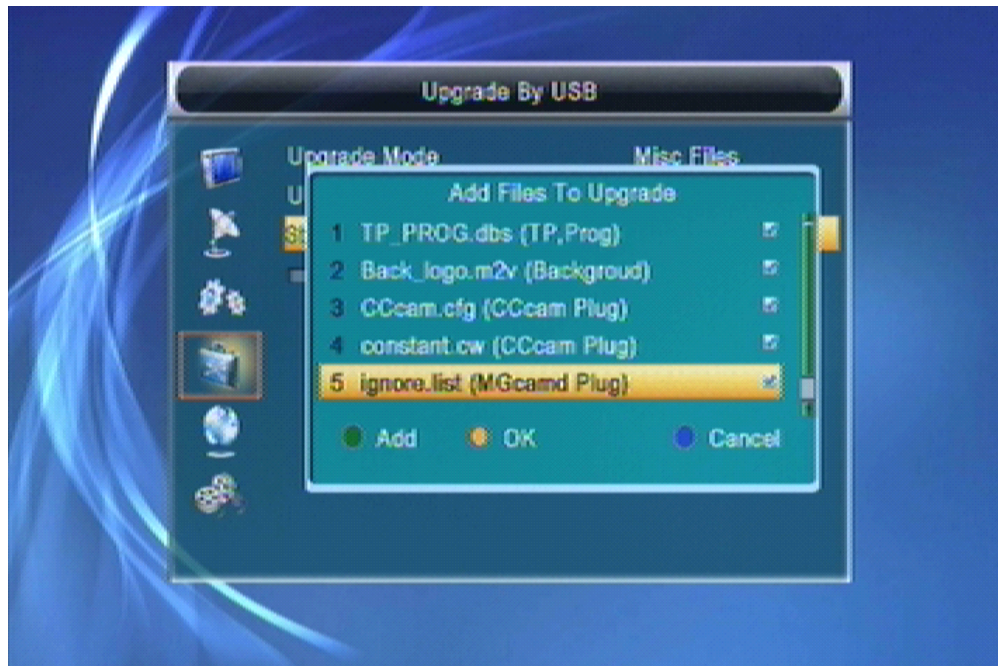


HD PVR 800 Satellite /TP/Channels list Editor Tool:

Open the SatHawk-Editor:

User can select the bumped firmware file with U disk, then open it:

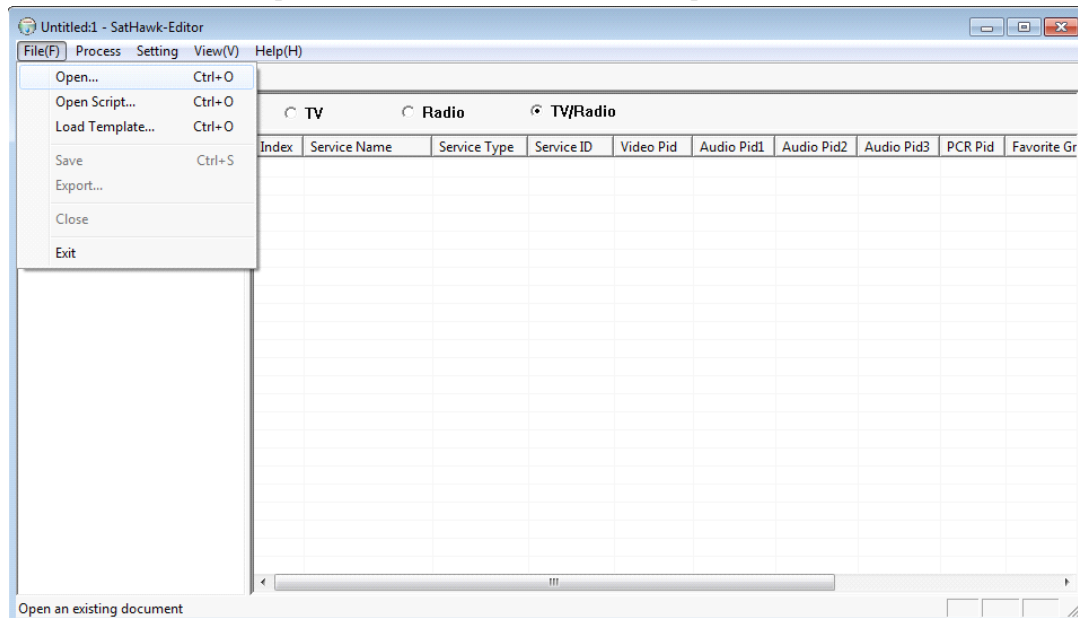

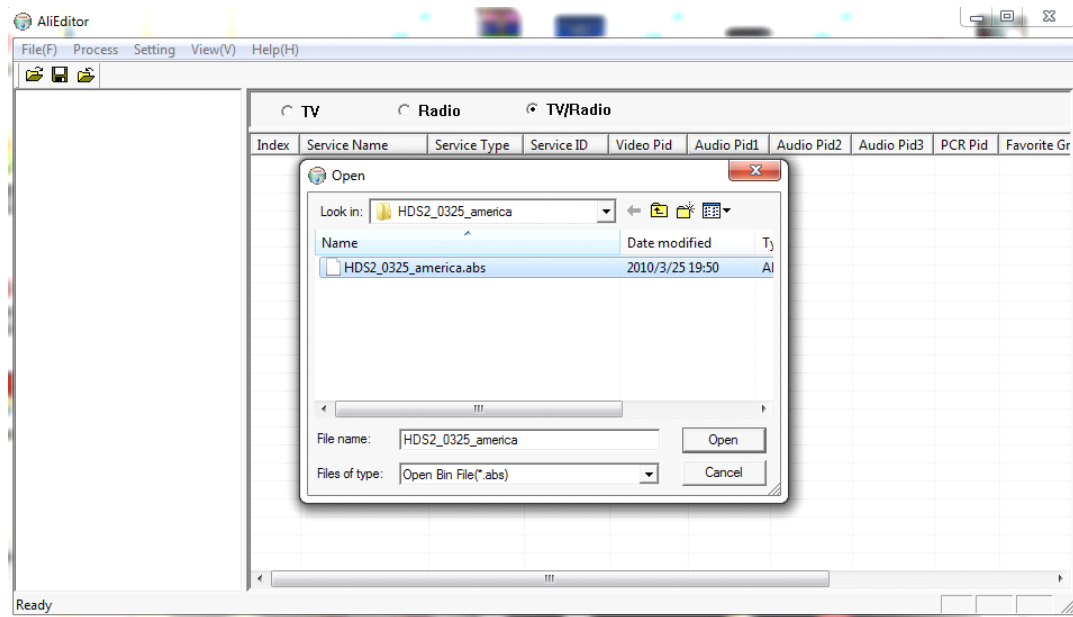

User can add /edit/change the sat/TP/channels, then save the files.

