


TV42



TERK Technologies
63 Mall Drive
Commack, NY 11725

For Customer Service Call:
1 800-942-8375 or E-mail www.terk.com


U.S. Patent # 8,858,388. Other patents pending.
TERK and the TERK logo are registered trademarks of
TERK Technologies Corporation.
© 1999 TERK Technologies Corp.

MA-TV42-1/99

TERK®

TERK®

**READ
THIS
FIRST!**

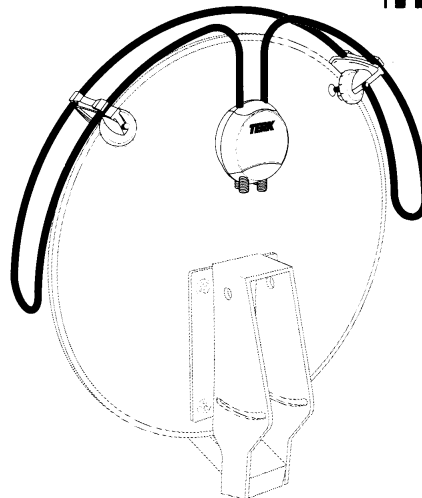

TV42

***Amplified, Clip-on TV Antenna
for Dual-LNB Satellite Dish***

About Your New TV42 Outdoor TV Antenna...

The TV42 is the perfect complement to any 18-inch, dual-LNB satellite dish system. It picks up VHF and UHF signals so you can enjoy local programming, at no extra cost, along with your satellite programming.

This premier TERK antenna has been packaged with everything you need for installation. Before installing, please verify that all items have been included in this package.

- (1) TV42 antenna
- (2) TERK mounting clips
- (2) indoor diplexer
- (2) black, 28-inch coaxial cable with weather boots
- (4) white, 1-foot coaxial cables

The TV42 features an internal amplifier that minimizes signal loss so signal can be transmitted to televisions throughout your home. The amplifier is powered by the DSS receiver, so no additional power supply is required. Because TERK's antenna elements are manufactured to be weather-resistant, they'll perform at their best for many years to come.

For Best Reception Results...

For the best reception results, the satellite dish and antenna combination should be high off the ground with minimal signal obstructions. On the side of your house (close to the roof) or on the roof itself generally offer the best environment for reception.

Remember, you can always rotate the antenna on the dish to adjust your reception.

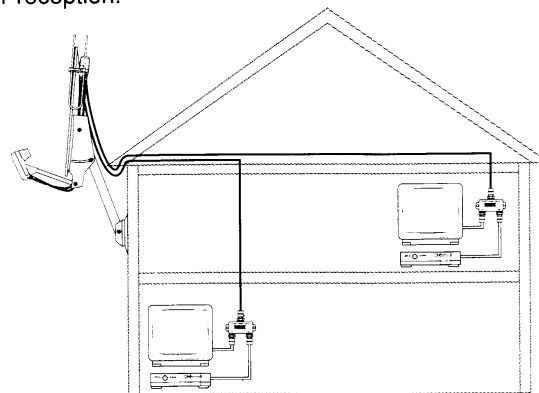



Diagram not to scale.

A Note on Operation...


To switch between viewing local and satellite programming you must first press the appropriate button on your remote control.

Assembly and Installation


1. Turn off the satellite receiver.
2. Unsnap the antenna from the back notch. The clips should be positioned at the 10 o'clock and 2 o'clock positions on the antenna.

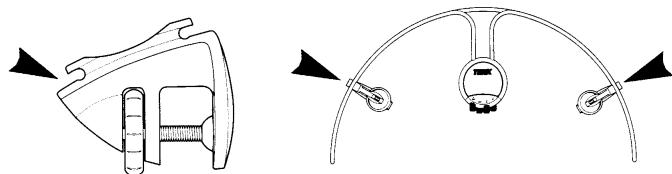


3. Hold the antenna to the back of the dish so that the circular housing is centered with the TERK logo facing out. Maneuver the dish in between the clips, one at a time.




4. Tighten the clips by turning the thumb-wheel screw clockwise only enough so the antenna does not fall off the dish.
5. Connect the both black, 28-inch coaxial cables from the satellite dish's LNB outputs to the antenna's "IN" terminals.

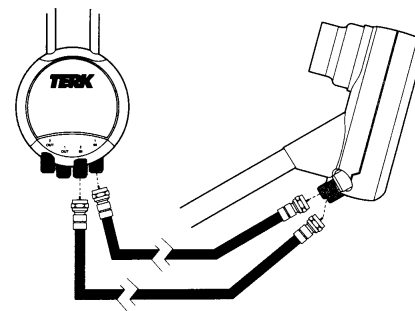

6. If your satellite dish is already installed, disconnect the coaxial cables that connect the dish's LNB to the receiver (TV) and connect it to the TV42's "OUT" terminals. Run these cables into your home and to the IN terminals on the indoor diplexers provided. If the satellite dish is being installed at the same time as the TV42, these cables should either be packaged with your satellite dish or purchased along with it.



7. Connect two white, 1-foot coaxial cables from the diplexers' SATELLITE terminals to the satellite receivers' OUT terminals. Connect two other white, 1-foot coaxial cables from the diplexers' ANTENNA terminals to the TVs' ANTENNA INs.

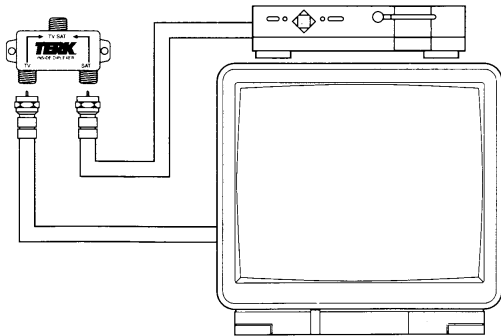

8. Set one receiver TV to your favorite channel and rotate the antenna around the dish until you receive the desired reception. Tighten the clips so that the TV42 antenna is firmly secured to the satellite dish in that position.

Now enjoy your local programming!

Limited Warranty

TERK Technologies Corp. (TERK) warrants this product against defects in materials or workmanship for one year from the date of purchase. During this warranty period, this product will be repaired or replaced, at TERK's option, without charge.

Please read your instructions thoroughly and use this product only as directed. This warranty does not cover any damage due to commercial use, accident, misuse, abuse or negligence. This warranty is valid only in the United States of America.

Repair or replacement as provided under this warranty is the exclusive remedy of the consumer. TERK shall not be liable for any incidental or consequential damages for breach of any expressed or implied warranty on this product, except to the extent prohibited by applicable law. Any implied warranty of merchantability or fitness for a particular purpose on this product is limited to the duration of this warranty.